



## The germ catcher

### Compact protection for all water dispensing units


The high quality of drinking water in Europe is ensured by legal regulations and the regular inspection of waterworks. However, even good drinking water can be affected by surprising problems, such as the sudden ingress of particles or bacterial contamination. The cause of these issues is sometimes the public pipeline network and other times the installations in the affected building. No matter what the underlying problem is, drinking water systems and water dispensers then quickly become full of germs and have to be thoroughly cleaned. This is where BWT bestcare MINI offers optimum protection, safely removing bacteria and particles from the water. BWT bestcare MINI is like insurance cover for your water!

#### Where can BWT bestcare MINI be used?

BWT bestcare MINI is the ideal solution for all water dispensing units, but it can also be used wherever cold water has to be safe to drink directly at the point of consumption.

#### Hollow-fibre membrane filter


with 0.02 µm pore size to remove bacteria and particles



#### Optimized water

(free of bacteria and particles)

- Water dispensing units

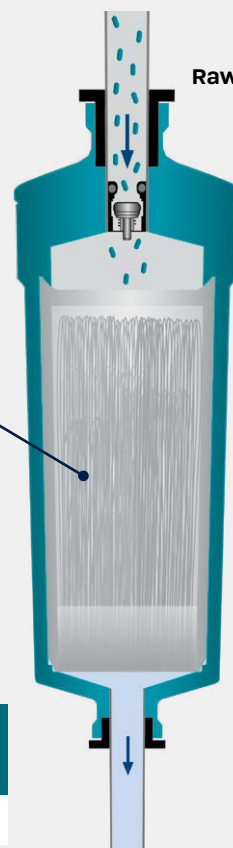

Raw water (with bacteria and particles)

Particles  
Bacteria

**BWT BESTCARE MINI  
FILTER CARTRIDGE**

## TECHNICAL DATA

Filter size	MINI
Maximum use [litres/months]	6,000/6*
Nominal flow rate [l/h]	300
Connection thread (in/out)	8 mm (push lock)
Total length (A) in mm	175
Ø filter cartridge (B) in mm	60
Weight in kg (dry/wet)	0.3/0.5
Order no. filter cartridge	FS10B00A00

\* Recommendation: Replace the filter cartridges regularly after 6 months or when the filter capacity is reached. Subject to change.

## BWT BESTCARE MINI – THE GERM CATCHER


### Main advantages

- » Protection of downstream equipment such as water dispensers
- » Perfect prevention against bacterial growth
- » Consistently high water quality

### Technical features

- » Hollow-fibre membrane filtration with 99,9999 % (log 6) retention of bacteria
- » Ideal for separation of particles
- » Retention of microplastics
- » Space-saving design with compact connection technology

Connection: 8 mm (push lock)

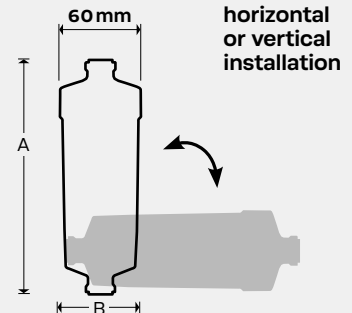

### Operating conditions

Inlet pressure:	2 – 8 bar
Water temperature:	4 – 30 °C
Ambient temperature:	4 – 40 °C



## ALTERNATIVE PRODUCT

	Description	Order number
BWT bestcare 10	BWT bestcare 10 is suitable for all water dispensing units - wherever cold water has to be safe to drink directly at the point of consumption.	125501411



## MANUFACTURER: SALES:

**BWT Holding GmbH:**  
Walter-Simmer-Str. 4  
5310 Mondsee, Austria  
[bwt-wam.com](http://bwt-wam.com)

**BWT water+more  
Deutschland GmbH:**  
[info@water-and-more.de](mailto:info@water-and-more.de)  
Tel.: +49 611 58019-0