




# The mineral dispenser

# SPECIAL FILTER FOR MINERALISING

BWT bestmin COFFEE is a filter that was developed specially for mineralising low-mineral soft water, which can occur naturally in places. In addition, after each reverse osmosis, BWT bestmin COFFEE can also be used as an external mineraliser.

This filter uses a special mineral granulate that guarantees specific and constant mineralisation, which benefits the brewing process for coffee and its sensory quality. In addition, the filter has a membrane module  $(0.1\,\mu\text{m})$  with which colloids and bacteria (log 6) are removed from the water. The water profits enormously from this with regard to purity and microbiological quality.

The filter system consists of a filter cartridge and a filter head with two check valves that prevent backflow of water into the supply system and filter as well as water discharge. Food grade BWT bestmin COFFEE filter systems are pressure-resistant and safe.

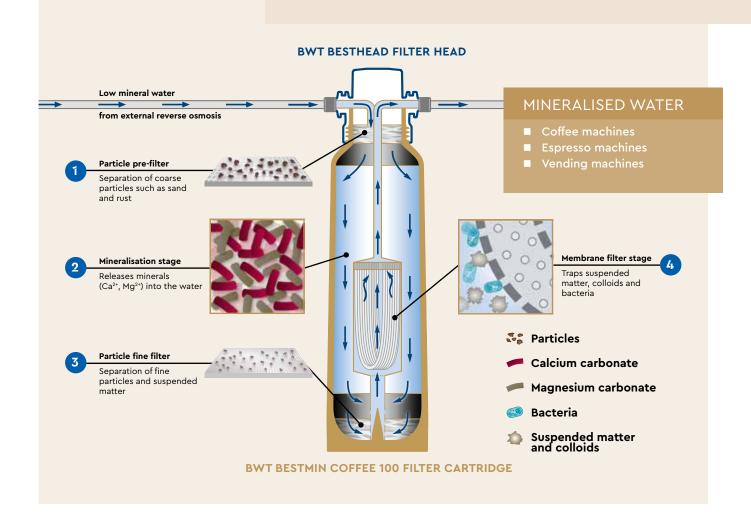





# **TECHNICAL DATA**

Filter size	100
Typical capacity in litres	10,000
Height without handle (B) in mm	475
Height with handle (A) in mm	500
Connection height (C) in mm	425
Ø filter cartridge (D) in mm	130
Weight in kg, (dry/wet)	4.2/5.6
Order no. for filter cartridge	FS24M99A00

Subject to change.

# BWT BESTMIN COFFEE - THE MINERAL DISPENSER

# Main advantages:

- Specially suitable for local low-mineral raw water in soft water areas as well as after reverse osmosis
- Purest bacteria-free water at all times thanks to integrated BWT membrane technology
- Frees water from undesirable accompanying substances and microplastics
- Guarantees a balanced minerals ratio in the filtrate
- Supplies perfect water for making sensorily high-quality hot beverages

### **Technical features:**


- Mineralising of low-salt raw water
- BWT ultrafiltration membrane (0.1 μm)
- Retention of bacteria with 99.9999% (log 6)
- Filtration of the complete processed water
- Easy to install using universal BWT besthead FLEX connection system

Connection:  3/8" × 3/8"  Vertical installation only
OPERATING CONDITIONS

Input pressure: 2-8 bar Water temperature: 4-30 °C Ambient temperature: 4-40 °C


# USE/INSTALLATION

#### **Standalone**



BWT water+more products for remineralising	PREMIUM	PREMIUM	BWT bestmin COFFEE
Magnesium mineralising based on BWT RO	~		
Remineralising based on BWT RO		~	~
BWT magnesium technology	~		
Integrated active carbon filtration	~	~	
Retention of bacteria (log 6)	~		~
Retention of particles and microplastic (0.1 $\mu$ m)	~		~
Use in in BWT bestaqua ROC Coffee	~		
Use in BWT bestaqua ROC MIN		~	
Mineralising of natural soft water		✓	~
Standalone use without RO		<b>✓</b>	<b>✓</b>

#### External after reverse osmosis



## **ACCESSORIES**

7.00200020				
	Connection	Order number		
BWT besthead FLEX filter head	BWT besthead FLEX with 2 connectors 90° elbow, FLEX Insert, M 3/8" made from GFP	FS00Z20A00		
BWT besthead FLEX Set 1	BWT besthead FLEX with 2 connectors 90° elbow, FLEX Insert, M $\%$ " made from GFP, connection hose DN 8, 1.5 m, with ball valve, FLEX Insert 90° elbow made from GFP, cap nut FM $\%$ ", connector straight, FLEX Insert × M $\%$ " made from GFP, reduction FM $\%$ " × M $\%$ " made from GFP	FS00Z39A00		

# MANUFACTURER:

A-5310 Mondsee

BWT water + more GmbH Walter-Simmer-Str. 4 SALES:

BWT water+more Deutschland: info@water-and-more.de · Tel.: +49 (0)611 58019-0

BWT water + more Austria: kundenservice.wm@bwt-group.com · Tel.: +43 (0)6232 5011-1164

BWT Aqua AG Schweiz:

info@bwt-aqua.ch · Tel.: +41 (0)61 7558899

