

MINI

BWT bestcare



The germ catcher



COMPACT PROTECTION FOR WATER DISPENSERS AND ALL DRINKING WATER SYSTEMS

The high quality of drinking water in Europe is ensured by legal regulations and the regular inspection of waterworks. However, even good drinking water can be affected by surprising problems, such as the sudden ingress of particles or bacterial contamination. The cause of these issues is sometimes the public pipeline network and other times the installations in the affected building. No matter what the underlying problem is, drinking water systems and water dispensers then quickly become full of germs and have to be thoroughly cleaned. This is where BWT bestcare MINI offers optimum protection, safely removing bacteria and particles from the water. BWT bestcare MINI is like insurance cover for your water!

Where can BWT bestcare MINI be used?

BWT bestcare MINI is the ideal solution for all water dispensers and drinking water systems, but it can also be used wherever cold water has to be safe to drink directly at the point of consumption.

Hollow-fibre membrane filter
with 0.02 µm pore size
to remove bacteria and
particles

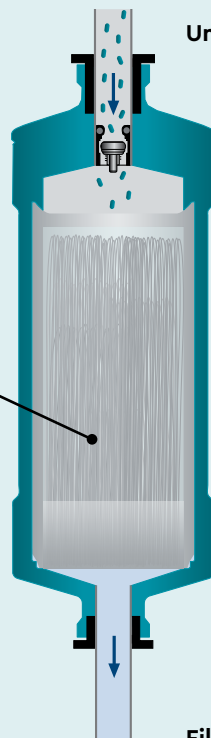

Untreated water (with bacteria and particles)

Filtered water (free of bacteria and particles)

BWT BESTCARE MINI FILTER CARTRIDGE

SPECIFICATIONS

Filter size	MINI
Maximum use [litres/months]	6,000/6 months
Nominal flow rate [l/h]	300
Connection thread (in/out)	8 mm (push lock)
Total length (A) in mm	175
Ø filter cartridge (B) in mm	60
Installation length (C) in mm	175
Weight in kg (dry/wet)	0.3/0.5
Order no. filter cartridge	FS10B00A00

Subject to change.

BWT BESTCARE MINI – THE GERM CATCHER


Main advantages

- Hollow-fibre membrane filter to retain 99.9999% (log 6) of bacteria
- Secure prevention of bacterial contamination
- Retention of particles
- Horizontal or vertical installation
- Consistently high water quality

Technical features

- Ultra-compact anti-bacterial filtration system
- Optimum protection and hygiene
- Ideal for drinking water dispensers
- Space-saving design with compact connection technology

Connection: 8 mm (push lock)

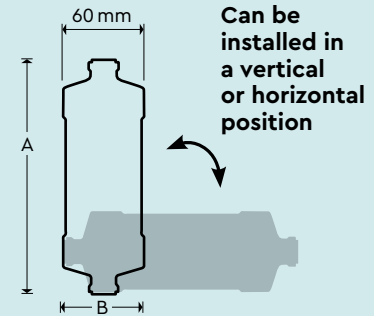

OPERATING CONDITIONS

Inlet pressure:	2–8 bar
Water temperature:	4–30 °C
Ambient temperature:	4–40 °C



ALTERNATIVE PRODUCT

	Description	Order number
BWT bestcare S	BWT bestcare is suitable for all water dispensers and drinking water systems – wherever cold water has to be safe to drink directly at the point of consumption.	FS22B00A00



MANUFACTURER:

BWT Holding GmbH
Walter-Simmer-Str. 4
A-5310 Mondsee

SALES:

BWT water+more Deutschland:
info@water-and-more.de · Tel.: +49 (0)611 58019-0

BWT water + more Austria:
kundenservice.wm@bwt-group.com · Tel.: +43 (0)6232 5011-1164

BWT Aqua AG Schweiz:
info@bwt-aqua.ch · Tel.: +41 (0)61 7558899